




QUICK START GUIDE FOR SX-3000 STANDALONE INTEGRATED MEDIA BLOCK™ WITH ENTERPRISE STORAGE / ENTERPRISE STORAGE PLUS

English version
SMS version 9.0
March 12, 2015


STEP 1 Packing list

1. Remove the packaging from the box.
2. Check the contents of the box. The contents may vary by country/ region. Refer to the packaging for the actual contents.


SX-3000 Standalone Integrated Media Block™

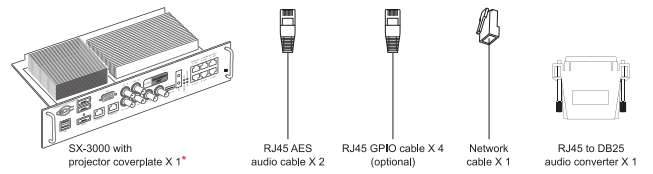


Enterprise Storage (Model Name: PSD-3000-U2)

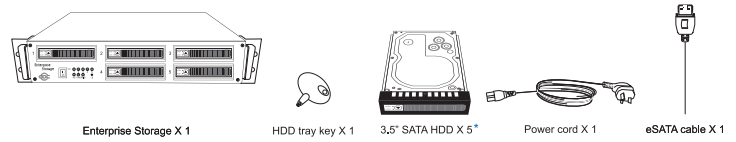

Enterprise Storage Plus (Model Name: PSD-3000-U2+)

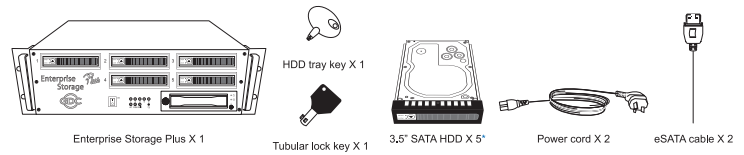

Technical Document



* The type of coverplate depends on projector model.
* The number of HDD will vary according to customer's requirement.

— page 2 —




Powering your digital cinema experience

www.gdc-tech.com

Hong Kong • Beijing • Shenzhen • Barcelona • Lima • Los Angeles • Mexico City • Mumbai • São Paulo • Singapore • Tokyo • Jakarta

STEP 2 Installing SX-3000


1. Ensure that the projector is powered off.
2. Remove existing interface board/ placeholders from projector. (the location of board/ placeholders are different for each projector)
3. Install SX-3000 into the projector. Please refer to Section 2 of SX-3000 with Portable Storage/ Enterprise Storage installation manual for installing SX-3000 into different projector models.

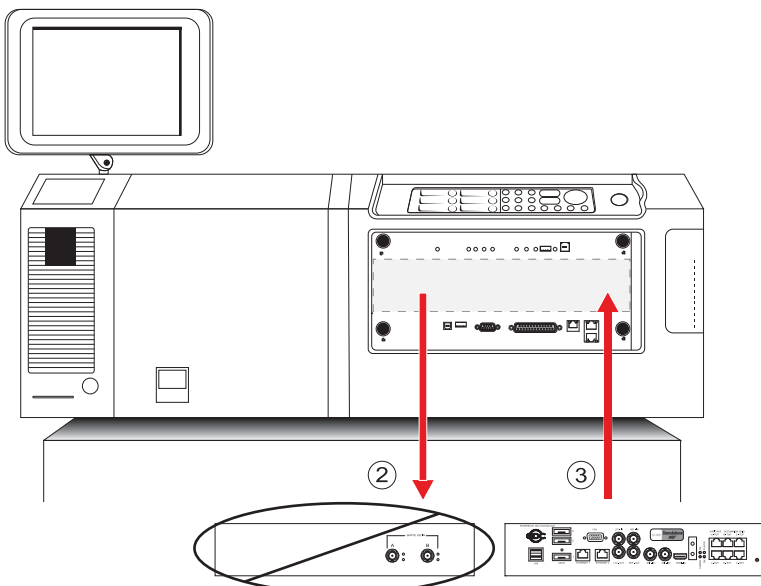

— page 3 —

STEP 3 Projector network


1. Connect the provided Cat-5e LAN cable from the SX-3000 Ethernet 2 port to the projector's Ethernet port.
2. Connect an external monitor to the front VGA connection of the SX-3000.
3. Connect keyboard and mouse or touch panel control (TPC) to the USB connection of the SX-3000.

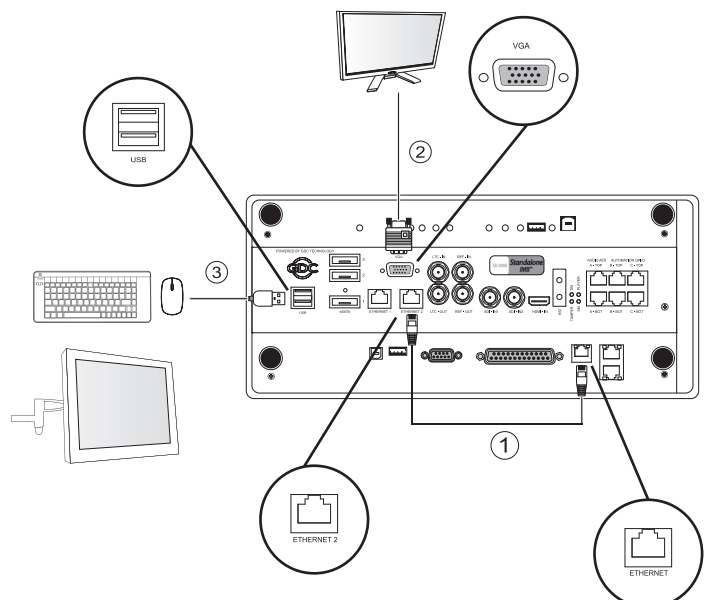

— page 4 —

STEP 4 Installing Hard Disks into Enterprise Storage / Enterprise Storage Plus

- 1. Using the HDD tray key provided, turn the HDD tray lock to the "OPEN" position.
- 2. Push the "OPEN/LOCK" icon to release the handle.
- 3. Insert the HDD tray (with HDD installed) into an open slot on the Enterprise Storage / Enterprise Storage Plus. Push the tray handle to fully insert the HDD tray.
- 4. Using the HDD tray key provided, turn the lock to "LOCK" position to lock the HDD tray to the Enterprise Storage / Enterprise Storage Plus.

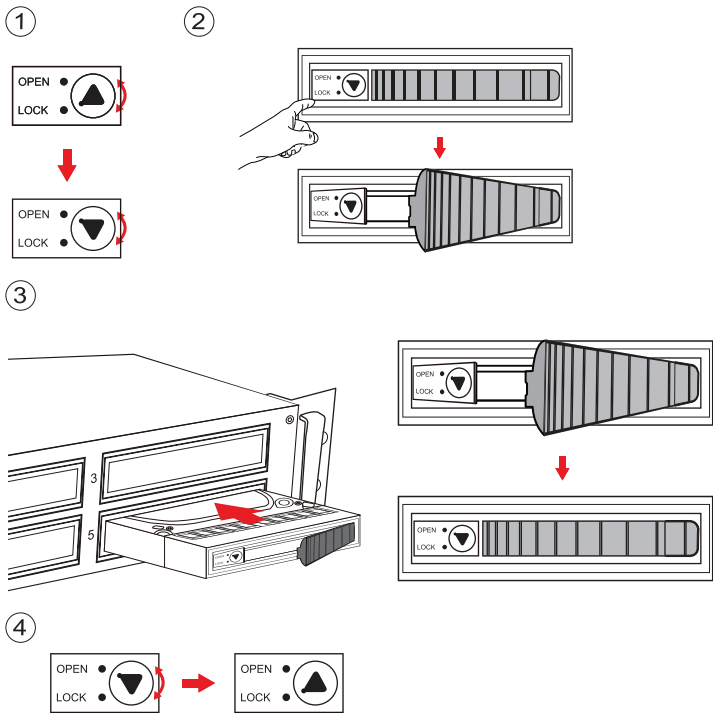



Caution:

- 1. Please gently push the HDD tray when inserting to avoid damage to the component.
- 2. Do not force the HDD tray into the housing if you think it is installed incorrectly. This may damage the Enterprise Storage / Enterprise Storage Plus.
- 3. The HDD labels should be facing up and the connector should be facing down when installing the HDD onto the HDD tray.
- 4. Do not take out the HDDs during operation.
- 5. During operation, the temperature of the HDD may exceed 50°C. Please take care when handling hot drives.

STEP 5 Installing Enterprise Storage / Enterprise Storage Plus into the pedestal


- 1. Put the Enterprise Storage / Enterprise Storage Plus to the 19" pedestal / rack.
- 2. Tighten four screws to fix the Enterprise Storage / Enterprise Storage Plus.

NOTE: Please insert Enterprise Storage / Enterprise Storage Plus into the highest position of the pedestal.

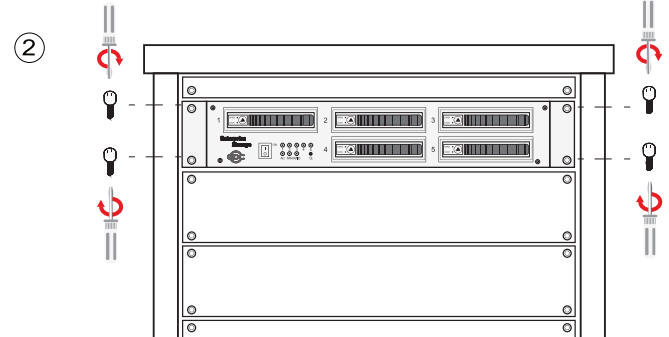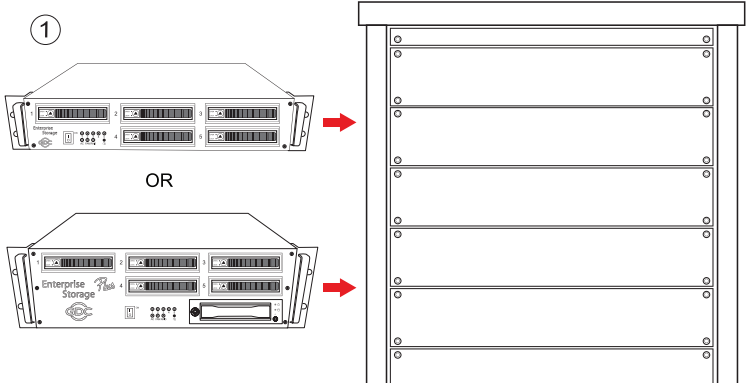


STEP 6 Connecting Enterprise Storage / Enterprise Storage Plus drive bay to SX-3000

- 1. Take out the power cord(s) from the packaging and connect to the power connector of Enterprise Storage / Enterprise Storage Plus. For Enterprise Storage Plus, please make sure that both power cords of the dual-redundant power supply are connected.
- 2. Connect the eSATA cable(s) to the back of the Enterprise Storage / Enterprise Storage Plus for data transfer.
- 3. For Enterprise Storage / Enterprise Storage Plus, insert the eSATA cable into the SX-3000 eSATA port 1. For Enterprise Storage Plus, connect another eSATA cable from "eSATA CRU" port on Enterprise Storage Plus to eSATA port 2 on the SX-3000.
- 4. Power on the Enterprise Storage / Enterprise Storage Plus with the switch on front panel. Then power on the projector with SX-3000 before moving on to Step 7.

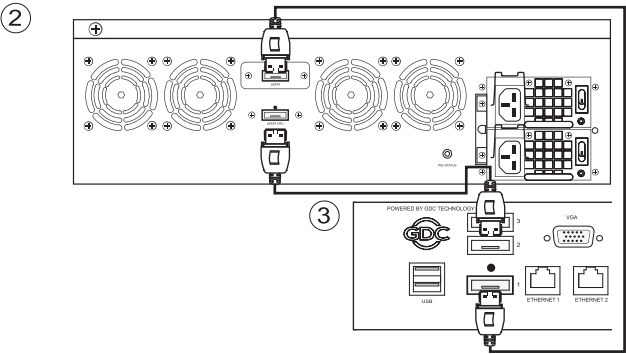

STEP 7 Operating the SX-3000 with the Enterprise Storage / Enterprise Storage Plus

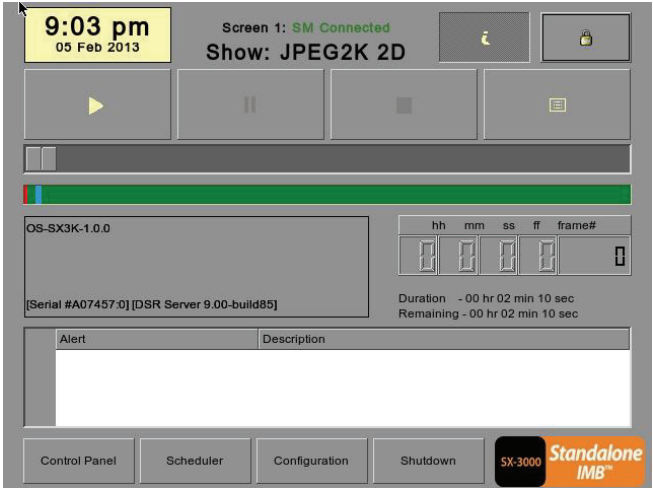

You can now start to use the SX-3000 and Enterprise Storage / Enterprise Storage Plus by accessing the SMS interface.

For details, please refer to SX-3000 with Portable Storage/ Enterprise Storage user manual.

Should you have any questions, please contact 24/7 engineering support hotline:

North America	+1 877 743 2872 (Toll Free)	Latin America	+52 55 8851 1198
Europe	+34 928 912 295	China	+86 400 886 0966 (Toll Free)
North Asia	+852 3520 0920	India	+91 022 4044 0500
South East Asia	+65 6100 4328	Australia/ New Zealand	+61 407 040 744